


# Celestino™ Lighted Mirror

Product Specifications

CORDOVA®  
BY ELECTRIC MIRROR

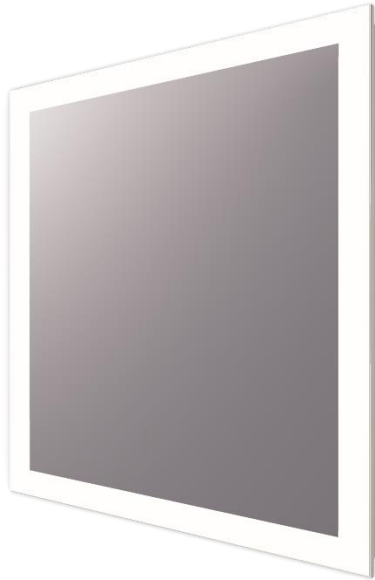

## PRODUCT DESCRIPTION

Combining the allure of a refined border of forward-facing task lighting with rich and luxurious back-lit wall glow, Celestino™ bathes your entire bathroom in a halo of elegant beauty.

## SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting as well as wall-glow ambient lighting around the mirror. Mirror shall have uniform light output in frosted areas, using LEDs with greater than or equal to 90 CRI (color rendering index).

## THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

## FEATURES AND BENEFITS

- Copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Wall-glow ambient lighting
- Energy efficient
- Easy installation
- Title 24 compliance available
- Most sizes in stock for quick delivery
- 3-year limited warranty
- Covered by one or more patents

## AVAILABLE OPTIONS

- Touch dimming<sup>1</sup>
- Clock<sup>1</sup>
- Cord connect<sup>1</sup>
- Custom mirror sizes<sup>1</sup>
- Forward-phase, dimmable, replaceable LEDs
- 0-10V dimming<sup>1</sup>

## LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 636 lumens per foot
- L<sub>70</sub> 50,000-hour LED lifespan
- Maximum 84 lumens per watt efficacy

## SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- Safety-backed mirror

<sup>1</sup> Minimum order quantity required.

**INSTALLATION SPECIFICATIONS**

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Fixture should be controlled by an on/off switch
- Installation wiring may be different on mirrors equipped with additional options
- Mirror can only be hung in the WxH orientation as show and is not field interchangeable

**MODELS**

Base Model*	Dimensions**	Power Requirements
CEL2-24.00x36.00-LHO-OS-30K***	24"W x 36"H x 1.83"D (610mm x 914mm x 46.5mm)	120/240 VAC, 66W
CEL2-30.00x42.00-LHO-OS-30K	30"W x 42"H x 1.83"D (762mm x 1067mm x 46.5mm)	120/240 VAC, 66W
CEL2-36.00x36.00-LHO-OS-30K***	36"W x 36"H x 1.83"D (914mm x 914mm x 46.5mm)	120/240 VAC, 85W
CEL2-42.00x42.00-LHO-OS-30K	42"W x 42"H x 1.83"D (1067mm x 1067mm x 46.5mm)	120/240 VAC, 104W
CEL2-48.00x36.00-LHO-OS-30K***	48"W x 36"H x 1.83"D (1219mm x 914mm x 46.5mm)	120/240 VAC, 104W
CEL2-60.00x36.00-LHO-OS-30K***	60"W x 36"H x 1.83"D (1524mm x 914mm x 46.5mm)	120/240 VAC, 122W

\* Base model numbers shown only. To specify additional options, contact Cordova Mirrors at sales@cordovamirrors.com.

\*\*\* In-stock item available for quick shipment.

**DIMENSIONAL DRAWING** (Not to scale.)

