


# Valeria™ Lighted Mirror

Product Specifications

CORDOVA®  
BY ELECTRIC MIRROR

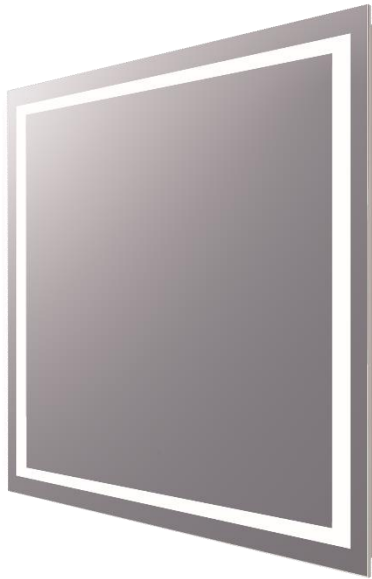

## PRODUCT DESCRIPTION

Add the tastefully refined lines of Valeria™ to your design and bring together any space with definitive style. With a precise, tailored band of frosted light inset from a polished-edge border, it creates a spectacular focal point for any room.

## SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting. Mirror shall have uniform light output in frosted areas, using LEDs with greater than or equal to 90 CRI (color rendering index).

## THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

## FEATURES AND BENEFITS

- Copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-year limited warranty
- Covered by one or more patents

## AVAILABLE OPTIONS

- Touch dimming
- Clock
- Cord connect
- Custom mirror sizes
- Forward-phase, dimmable, replaceable LEDs
- 0-10V dimming<sup>2</sup>

## LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 492 lumens per foot
- L<sub>70</sub> 36,000-hour LED lifespan
- Maximum 96 lumens per watt efficacy

## SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- Safety-backed mirror

Note: Minimum order quantity may apply. Contact [sales@cordovamirrors.com](mailto:sales@cordovamirrors.com) for information.

<sup>1</sup> See technology specification sheets for more information.

<sup>2</sup> Minimum order quantity required.

**INSTALLATION SPECIFICATIONS**

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Fixture should be controlled by an on/off switch
- Installation wiring may be different on mirrors equipped with additional options
- Mirror can only be hung in the WxH orientation as show and is not field interchangeable

**MODELS**

| Base Model*                 | Dimensions**                                       | Power Requirements |
|-----------------------------|----------------------------------------------------|--------------------|
| VAL2-24.00x36.00-LSO-OS-30K | 24"W x 36"H x 1.83"D<br>(610mm x 914mm x 46.5mm)   | 120/240 VAC, 42W   |
| VAL2-30.00x42.00-LSO-OS-30K | 30"W x 42"H x 1.83"D<br>(762mm x 1067mm x 46.5mm)  | 120/240 VAC, 53W   |
| VAL2-36.00x36.00-LSO-OS-30K | 36"W x 36"H x 1.83"D<br>(914mm x 914mm x 46.5mm)   | 120/240 VAC, 53W   |
| VAL2-42.00x42.00-LSO-OS-30K | 42"W x 42"H x 1.83"D<br>(1067mm x 1067mm x 46.5mm) | 120/240 VAC, 64W   |
| VAL2-48.00x36.00-LSO-OS-30K | 48"W x 36"H x 1.83"D<br>(1219mm x 914mm x 46.5mm)  | 120/240 VAC, 64W   |
| VAL2-60.00x36.00-LSO-OS-30K | 60"W x 36"H x 1.83"D<br>(1524mm x 914mm x 46.5mm)  | 120/240 VAC, 75W   |

\* Base model numbers shown only. To specify additional options, contact Cordova Mirrors at [sales@cordovamirrors.com](mailto:sales@cordovamirrors.com).

**DIMENSIONAL DRAWING** (Not to scale.)

