


# Valeria™ Lighted Mirror

Product Specifications

CORDOVA®  
BY ELECTRIC MIRROR

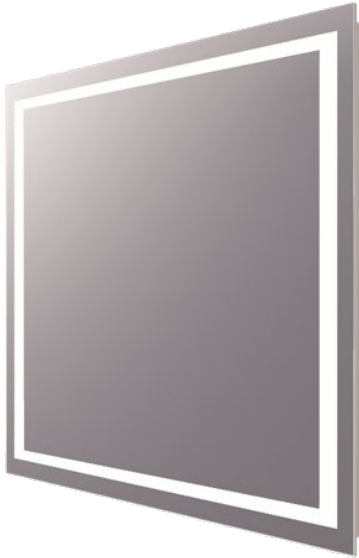

## FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-year limited warranty
- Covered by one or more patents
- Designed in America and sourced globally

## AVAILABLE OPTIONS

- Touch dimming<sup>1,2</sup>
- Nightlight<sup>1,2</sup>
- Clock<sup>1,2</sup>
- Bluetooth<sup>1,2</sup>
- Defogger<sup>1</sup>
- 0-10V dimming<sup>1</sup>
- Forward-phase dimming<sup>1</sup>
- 277V available<sup>1,3</sup>
- Cord connect<sup>1</sup>
- Custom sizes<sup>1</sup>

## LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 516 lumens per foot
- Maximum 96 lumens per watt efficacy
- Calculated L<sub>70</sub> 36,000-hour LED lifespan

## SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror

<sup>1</sup> Minimum order quantity required.

<sup>2</sup> See technology specification sheets for more details.

<sup>3</sup> May not be compatible with all upgrades and options.

## PRODUCT DESCRIPTION

Add the tastefully refined lines of Valeria™ to your design and bring together any space with definitive style. With a precise, tailored band of frosted light inset from a polished-edge border, it creates a spectacular focal point for any room.

## SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas, using LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 3-year warranty.

## THE CORDOVA MIRRORS ADVANTAGE

- ☑ High-quality products at a value price
- ☑ Carefully chosen, globally sourced materials
- ☑ Natural-looking LED lighting for a superior reflection
- ☑ Best-in-class customer service team
- ☑ In-stock products ready for immediate shipments

**INSTALLATION SPECIFICATIONS**

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

**MODELS**

Base Model*	Dimensions	Power Requirements
VAL2.1-24.00x36.00-LSO-OS-30K	24"W x 36"H x 1.77"D (610mm x 914mm x 45mm)	120/240 VAC, 42W
VAL2.1-30.00x42.00-LSO-OS-30K	30"W x 42"H x 1.77"D (762mm x 1067mm x 45mm)	120/240 VAC, 54W
VAL2.1-36.00x36.00-LSO-OS-30K	36"W x 36"H x 1.77"D (914mm x 914mm x 45mm)	120/240 VAC, 54W
VAL2.1-42.00x42.00-LSO-OS-30K	42"W x 42"H x 1.77"D (1067mm x 1067mm x 45mm)	120/240 VAC, 65W
VAL2.1-48.00x36.00-LSO-OS-30K	48"W x 36"H x 1.77"D (1219mm x 914mm x 45mm)	120/240 VAC, 64W
VAL2.1-54.00x42.00-LSO-OS-30K	54"W x 42"H x 1.77"D (1372mm x 1067mm x 45mm)	120/240 VAC, 76W
VAL2.1-60.00x36.00-LSO-OS-30K	60"W x 36"H x 1.77"D (1524mm x 914mm x 45mm)	120/240 VAC, 76W
VAL2.1-66.00x42.00-LSO-OS-30K	66"W x 42"H x 1.77"D (1677mm x 1067mm x 45mm)	120/240 VAC, 84W

\*Base model number shown only. To specify additional options, contact Cordova Mirrors at [sales@cordovamirrors.com](mailto:sales@cordovamirrors.com).

**DIMENSIONAL DRAWING** (Not to scale. Frost and border widths may vary depending on mirror size.)

