


# Celestino™ Series 1 Lighted Mirror

Product Specifications: Multifamily Standard Output LEDs

CORDOVA®  
BY ELECTRIC MIRROR

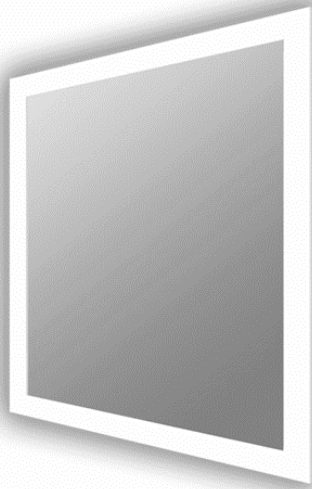

## FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Wall-glow ambient lighting on all four sides with diffuser for a finished side view
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-year limited warranty
- Designed in America and sourced globally

## AVAILABLE OPTIONS

- Touch dimming<sup>1,2</sup>
- Nightlight<sup>1,2</sup>
- Clock<sup>1,2</sup>
- Bluetooth<sup>1,2</sup>
- Defogger<sup>1</sup>
- CCT: 2,700K<sup>1</sup>
- 0-10V dimming<sup>1</sup>
- Forward-phase dimming<sup>1</sup>
- 277V available<sup>1,3</sup>
- Cord connect<sup>1</sup>
- Custom sizes<sup>1</sup>

## LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 516 raw lumens per foot
- Maximum 96 lumens per watt efficacy
- Calculated L<sub>70</sub> 50,000-hour LED lifespan

## SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror

<sup>1</sup> Minimum order quantity required.

<sup>2</sup> See technology specification sheets for more details.

<sup>3</sup> May not be compatible with all upgrades and options.

## PRODUCT DESCRIPTION

Combining the allure of a refined border of forward-facing task lighting with rich and luxurious back-lit wall glow, Celestino™ bathes your entire bathroom in a halo of elegant beauty.

## SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas, using LEDs with greater than or equal to 90 CRI (color rendering index).

## THE CORDOVA MIRRORS ADVANTAGE

- ☑ High-quality products at a value price
- ☑ Carefully chosen, globally sourced materials
- ☑ Natural-looking LED lighting for a superior reflection
- ☑ Best-in-class customer service team
- ☑ In-stock products ready for immediate shipments

# Celestino™ Series 1 Lighted Mirror

Product Specifications: Multifamily Standard Output LEDs

CORDOVA®  
BY ELECTRIC MIRROR

## INSTALLATION SPECIFICATIONS

- 120V hardwire electrical connection; provide 36" whip; junction box not required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming on/off wall switch
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

## MODELS

Base Model*	Dimensions	Lumens	Power Requirements
CEL1.2-24.00x36.00-LSO-OS-30K	24"W x 36"H x 1.77" (610mm x 914mm x 45mm)	4,128 lumens per fixture	120 VAC, 46W
CEL1.2-36.00x36.00-LSO-OS-30K	36"W x 36"H x 1.77"D (914mm x 914mm x 45mm)	5,160 lumens per fixture	120 VAC, 58W
CEL1.2-36.00x42.00-LSO-OS-30K	36"W x 42"H x 1.77"D (914mm x 1067mm x 45mm)	5,676 lumens per fixture	120 VAC, 63W
CEL1.2-42.00x42.00-LSO-OS-30K	42"W x 42"H x 1.77"D (1067mm x 1067mm x 45mm)	6,192 lumens per fixture	120 VAC, 69W
CEL1.2-48.00x36.00-LSO-OS-30K	48"W x 36"H x 1.77"D (1219mm x 914mm x 45mm)	6,192 lumens per fixture	120 VAC, 69W
CEL1.2-60.00x36.00-LSO-OS-30K	60"W x 36"H x 1.77"D (1524mm x 914mm x 45mm)	7,224 lumens per fixture	120 VAC, 81W

\*Base model number shown only. To specify additional options, contact Cordova Mirrors at [sales@cordovamirrors.com](mailto:sales@cordovamirrors.com).

## DIMENSIONAL DRAWING (Not to scale)

