


Celestino™ Lighted Mirror

Product Specifications:

CORDOVA®
BY ELECTRIC MIRROR

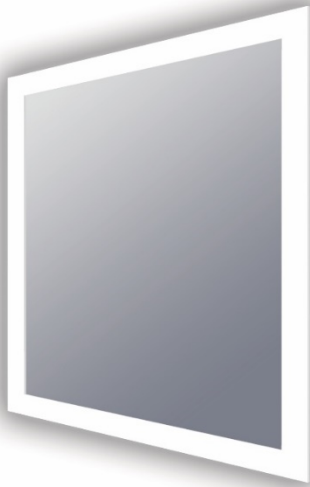

PRODUCT DESCRIPTION

Combining the allure of a refined border of forward-facing task lighting with rich and luxurious back-lit wall glow, Celestino™ bathes your entire bathroom in a halo of elegant beauty.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting as well as wall-glow ambient lighting around the mirror, and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas, using LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 3-year warranty.

THE CORDOVA MIRRORS ADVANTAGE

- ☑ High-quality products at a value price
- ☑ Carefully chosen, globally sourced materials
- ☑ Natural-looking LED lighting for a superior reflection
- ☑ Best-in-class customer service team
- ☑ In-stock products ready for immediate shipments

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™ glass
- Forward-facing task lighting
- Wall-glow ambient lighting on all four sides with diffuser for a finished side view
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- Title 24 compliance available
- 3-year limited warranty
- Covered by one or more patents
- Designed in America and sourced globally

AVAILABLE OPTIONS

- Touch dimming^{1, 2}
- Nightlight^{1, 2}
- Clock^{1, 2}
- Defogger¹
- 0-10V dimming¹
- Forward-phase dimming¹
- 277V available^{1, 3}
- Cord connect¹
- Custom sizes¹

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 720 lumens per foot
- Maximum 96 lumens per watt efficacy
- Calculated L₇₀ 50,000-hour LED lifespan

SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror

¹ Minimum order quantity required.

² See technology specification sheets for more details.

³ May not be compatible with all upgrades and options.

Celestino™ Lighted Mirror

Product Specifications:

CORDOVA®
BY ELECTRIC MIRROR

INSTALLATION SPECIFICATIONS

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

MODELS

Base Model*	Dimensions	Power Requirements
CEL2.1-24.00x36.00-LHO-OS-30K	24"W x 36"H x 1.77"D (610mm x 914mm x 45mm)	120/240 VAC, 66W
CEL2.1-30.00x42.00-LHO-OS-30K	30"W x 42"H x 1.77"D (762mm x 1067mm x 45mm)	120/240 VAC, 66W
CEL2.1-36.00x36.00-LHO-OS-30K	36"W x 36"H x 1.77"D (914mm x 914mm x 45mm)	120/240 VAC, 85W
CEL2.1-42.00x42.00-LHO-OS-30K	42"W x 42"H x 1.77"D (1067mm x 1067mm x 45mm)	120/240 VAC, 104W
CEL2.1-48.00x36.00-LHO-OS-30K	48"W x 36"H x 1.77"D (1219mm x 914mm x 45mm)	120/240 VAC, 104W
CEL2.1-54.00x42.00-LHO-OS-30K	54"W x 42"H x 1.77"D (1372mm x 1067mm x 45mm)	120/240 VAC, 115W
CEL2.1-60.00x36.00-LHO-OS-30K	60"W x 36"H x 1.77"D (1524mm x 914mm x 45mm)	120/240 VAC, 122W
CEL2.1-66.00x42.00-LHO-OS-30K	66"W x 42"H x 1.77"D (1677mm x 1067mm x 45mm)	120/240 VAC, 131W

*Base model number shown only. To specify additional options, contact Cordova Mirrors at sales@cordovamirrors.com.

DIMENSIONAL DRAWING (Not to scale.)

