



CANDELA[™] WARDROBE

PRODUCT DESCRIPTION

The strong, clean lines of the Candela[™] lighted wardrobe mirror present a look that's chic and contemporary. Featuring two precise frosted bands of luminescent LED light, it offers a fresh, on-trend addition to entryways, bedrooms, and walk-in closets.

SPECIFICATION STATEMENT

Solution shall consist of a lighted wardrobe-length mirror with forward-facing task lighting and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will have a 5-year limited warranty.

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- ADA compliant
- 5-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS

- Defogger¹
- 0-10V dimming ¹
- Touch dimming technology ^{1, 2}
- Custom sizes ¹
- Cord connect ¹

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 713 initial lumens/foot
- CRI: 90+
- Efficacy: 130 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours

² Minimum order quantity required.


³ See technology specification sheets for more details.

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- \checkmark Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment



DIMENSIONAL DRAWING (Not to scale.)

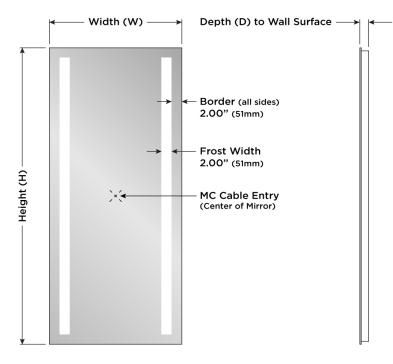

STANDARD MODEL

Model Number ¹	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
CAN8-26.00X60.00-LSO-OS2-30K	26" W x 60" H x 1.57" D (660mm W x 1,524mm H x 40mm D)	3,657	120VAC, 54W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model number shown. For assistance specifying additional options, please contact Cordova Mirrors.

 $^{\rm 2}$ Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.