

## CELESTINO™

### PRODUCT DESCRIPTION

Combining the allure of a refined border of forward-facing task lighting with rich and luxurious backlit wall-glow, Celestino™ bathes your entire bathroom in a halo of elegant beauty.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and wall-glow ambient lighting around the mirror using corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using LEDs with 90+ CRI (Color Rendering Index) and delivering 991 initial lumens/foot with an efficacy of 130 lumens/watt. Product will have a 5-year limited warranty.

### FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Wall-glow ambient lighting with diffuser for a finished side view
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 5-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Designed in the USA

### AVAILABLE OPTIONS

- Defogger <sup>1</sup>
- 0-10V dimming <sup>1</sup>
- Touch dimming technology <sup>1,2</sup>
- Custom sizes <sup>1</sup>
- Cord connect <sup>1</sup>

### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 991 initial lumens/foot
- CRI: 90+
- Efficacy: 130 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (reported): >54,000-hours


<sup>2</sup> Minimum order quantity required.

<sup>3</sup> See technology specification sheets for more details.

### THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

**DIMENSIONAL DRAWING** (Not to scale.)

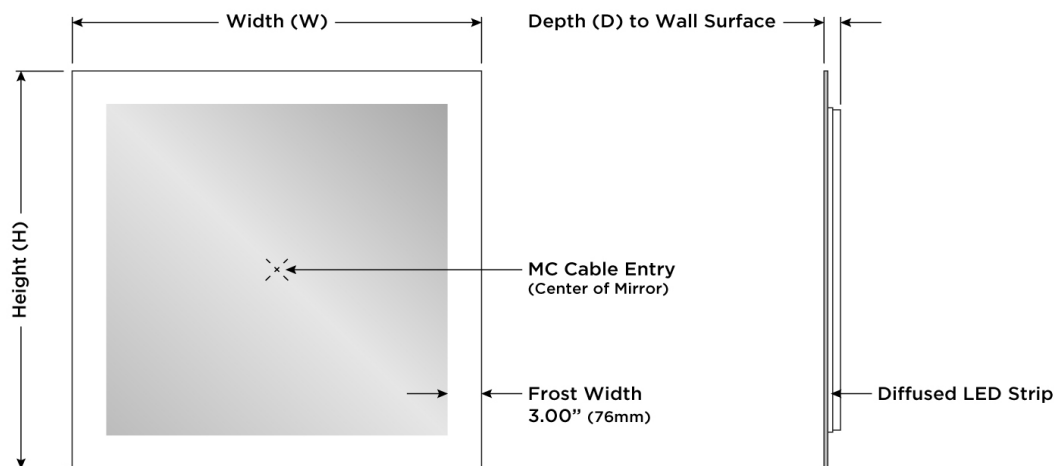

**STANDARD MODELS**

Model Number <sup>1</sup>	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
CEL8-24.00x36.00-LHO-OS2-30K	24" W x 36" H x 1.57" D (610mm W x 914mm H x 40mm D)	7,925	120VAC, 64W
CEL8-30.00x42.00-LHO-OS2-30K	30" W x 42" H x 1.57" D (762mm W x 1,067mm H x 40mm D)	9,906	120VAC, 80W
CEL8-36.00x36.00-LHO-OS2-30K	36" W x 36" H x 1.57" D (914mm W x 914mm H x 40mm D)	9,906	120VAC, 80W
CEL8-42.00x42.00-LHO-OS2-30K	42" W x 42" H x 1.57" D (1,067mm W x 1,067mm H x 40mm D)	11,887	120VAC, 96W
CEL8-48.00x36.00-LHO-OS2-30K	48" W x 36" H x 1.57" D (1,219mm W x 914mm H x 40mm D)	11,887	120VAC, 96W
CEL8-54.00x42.00-LHO-OS2-30K	54" W x 42" H x 1.57" D (1,372mm W x 1,067mm H x 40mm D)	13,868	120VAC, 111W
CEL8-60.00x36.00-LHO-OS2-30K	60" W x 36" H x 1.57" D (1,524mm W x 914mm H x 40mm D)	13,868	120VAC, 111W
CEL8-66.00x42.00-LHO-OS2-30K	66" W x 42" H x 1.57" D (1,677mm W x 1,067mm H x 40mm D)	15,850	120VAC, 127W

**SAFETY & INSTALLATION SPECIFICATIONS**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

<sup>2</sup> Tolerances for dimensions are  $\pm 1/8"$  ( $\pm 3$ mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.