

NURIA™ WITH WALL GLOW SERIES-1

PRODUCT DESCRIPTION

Heralded for its functional beauty, this Nuria™ features natural-looking forward-facing illumination with soft wall-glow on all four sides, creating a stunning focal point for any room.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and wall-glow ambient lighting on all four sides using corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will have a 5-year limited warranty.

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Wall-glow ambient lighting on all four sides with diffuser for a finished side view
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- ADA compliant
- 5-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS

- Defogger ¹
- 0-10V dimming ¹
- Touch dimming technology ^{1,2}
- Custom sizes ¹
- Cord connect ¹

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 713 initial lumens/foot
- CRI: 90+
- Efficacy: 130 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours


² Minimum order quantity required.

³ See technology specification sheets for more details.

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

DIMENSIONAL DRAWING (Not to scale.)

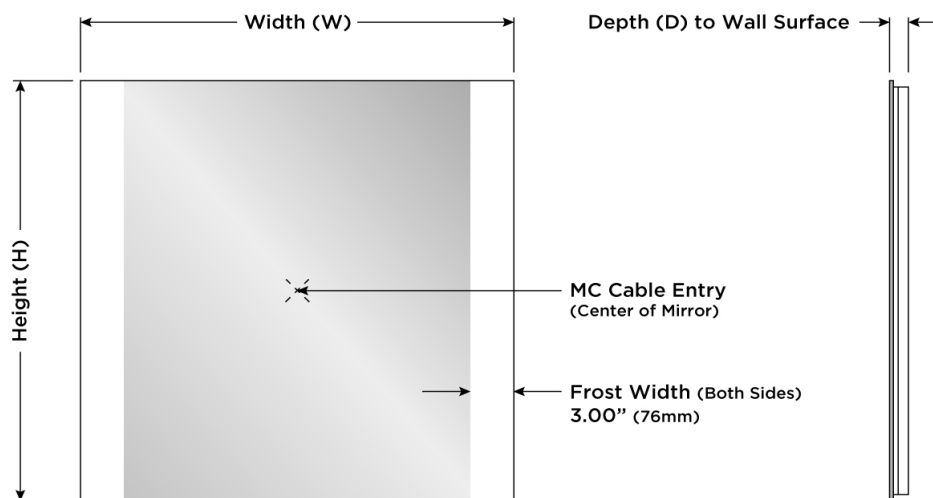

STANDARD MODELS

| Model Number ¹ | Dimensions ² | Initial Lumens/Fixture ³ | LED Power Requirements ³ |
|----------------------------------|---|-------------------------------------|-------------------------------------|
| NUR3-30.00X42.00-LSO-OS2-WG2-30K | 30" W x 42" H x 1.18" D (762mm W x 1,067mm H x 30mm D) | 8,559 | 120VAC, 70W |
| NUR3-36.00X42.00-LSO-OS2-WG2-30K | 36" W x 42" H x 1.18" D (914mm W x 1,067mm H x 30mm D) | 9,273 | 120VAC, 75W |
| NUR3-48.00X42.00-LSO-OS2-WG2-30K | 48" W x 42" H x 1.18" D (1,219mm W x 1,067mm H x 30mm D) | 10,699 | 120VAC, 87W |
| NUR3-60.00X42.00-LSO-OS2-WG2-30K | 60" W x 42" H x 1.18" D (1,524mm W x 1,067mm H x 30mm D) | 12,126 | 120VAC, 98W |

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3mm$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.