



ROMANA[™]

PRODUCT DESCRIPTION

With brilliant inward-facing directional task lighting and a sublimely sleek look, the Romana[™] lighted mirror combines the best of form and function to serve flawlessly in virtually any room.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with LEDs mounted in a 45-degree channel in the mirror's frame, with inward-facing directional lighting on the front face of the mirror. LEDs shall have an L70 reported life of >54,000 hours with a 90+ CRI (Color Rendering Index) and will be covered by an integrated diffuser. Product shall incorporate a mounted driver enclosure attached to the back of the mirror, and will have a 5-year limited warranty.

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror[™]
- Sleek and modern profile
- Inward-facing task lighting for brilliant facial illumination
- Greater illuminance with half the power consumption of traditional LED mirrors
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 5-year limited warranty
- Patent: www.electrimirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS

- Wall-glow ambient lighting ¹
- Defogger ¹
- 0-10V dimming ¹
- Touch dimming technology ^{1,2}
- Custom sizes ¹
- Cord connect ¹

FINISHES



- Other finishes available ¹


LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 351 initial lumens/foot
- CRI: 90+
- Efficacy: 98 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours
- Built-in EMX diffusers

² Minimum order quantity required.

³ See technology specification sheets for more details.

DIMENSIONAL DRAWING (Not to scale.)

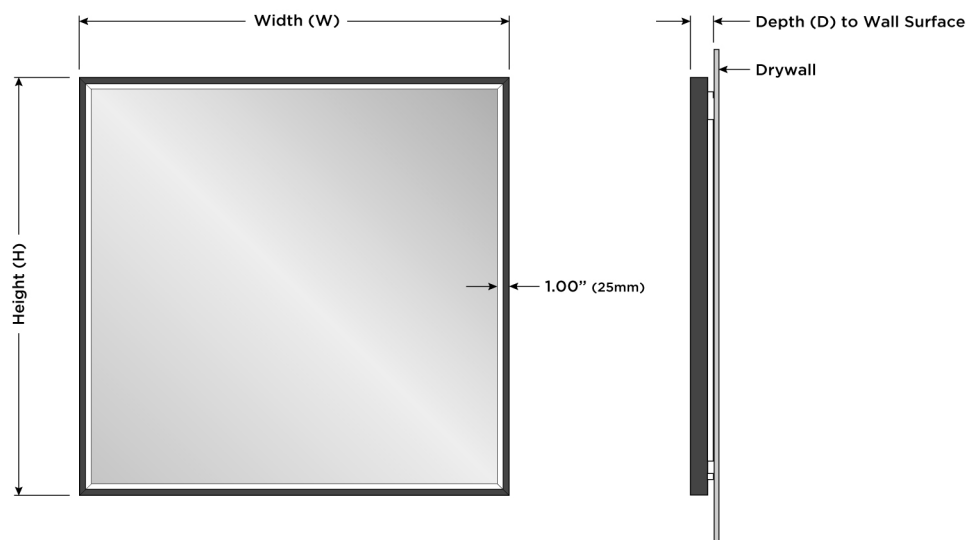

STANDARD MODELS

Model Number ¹	Finish	Dimensions ²	Initial Lumens/ Fixture ³	LED Power Requirements ³
ROM3-24.00X36.00-BK05-OS2-30K	Matte Black (BK-05)	24" W x 36" H x 1.97" D (610mm W x 914mm H x 50mm D)	3,388	120VAC, 38W
ROM3-36.00X36.00-BK05-OS2-30K	Matte Black (BK-05)	36" W x 36" H x 1.97" D (914mm W x 914mm H x 50mm D)	4,089	120VAC, 45W
ROM3-48.00X36.00-BK05-OS2-30K	Matte Black (BK-05)	48" W x 36" H x 1.97" D (1,219mm W x 914mm H x 50mm D)	4,790	120VAC, 53W
ROM3-60.00X36.00-BK05-OS2-30K	Matte Black (BK-05)	60" W x 36" H x 1.97" D (1,524mm W x 914mm H x 50mm D)	5,491	120VAC, 61W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model number shown. For assistance specifying additional options, please contact Cordova Mirrors.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3\text{mm}$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.