



TRANQUILIDAD™

PRODUCT DESCRIPTION

Creating an atmosphere of relaxed renewal, the Tranquilidad™ offers a harmonious and balanced design. Radiating serene ambient wall-glow, this calming centerpiece can transform any room into a tranquil oasis.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with wall-glow ambient lighting using corrosion-resistant glass. Mirror shall have uniform light output around the perimeter using LEDs with 90+ CRI (Color Rendering Index) and delivering 991 initial lumens/foot with an efficacy of 130 lumens/watt. Product will have a 5-year limited warranty.

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Wall-glow ambient lighting on all four sides with diffuser for a finished side view
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- ADA compliant
- 5-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS

- Defogger ¹
- 0-10V dimming ¹
- Touch dimming technology ^{1,2}
- Custom sizes ¹
- Cord connect ¹

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 991 initial lumens/foot
- CRI: 90+
- Efficacy: 130 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours


² Minimum order quantity required.

³ See technology specification sheets for more details.

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

DIMENSIONAL DRAWING (Not to scale.)

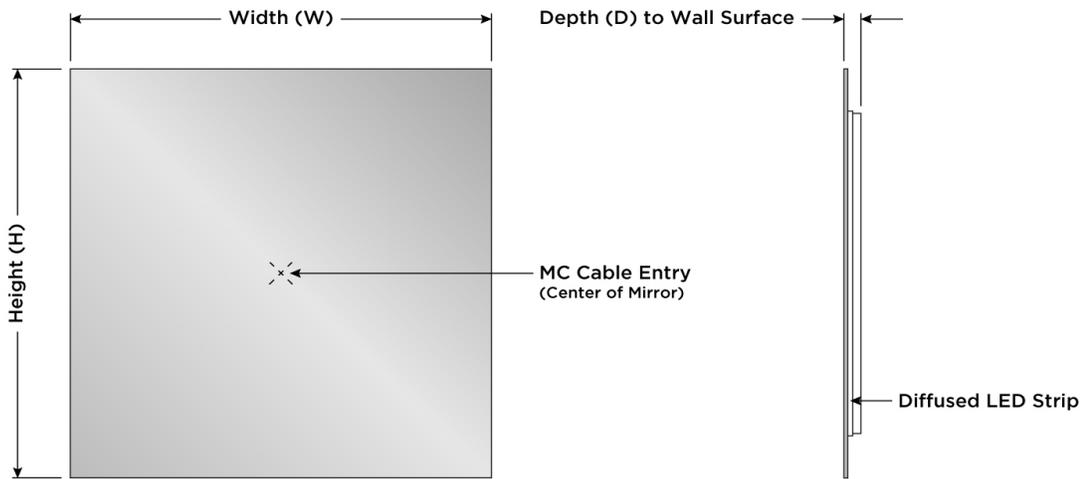

STANDARD MODELS

Model Number ¹	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
TRA8-24.00X36.00-LHO-OS2-30K	24" W x 36" H x 1.57" D (610mm W x 914mm H x 40mm D)	9,576	120VAC, 77W
TRA8-30.00X42.00-LHO-OS2-30K	30" W x 42" H x 1.57" D (762mm W x 1,067mm H x 40mm D)	11,557	120VAC, 93W
TRA8-36.00X36.00-LHO-OS2-30K	36" W x 36" H x 1.57" D (914mm W x 914mm H x 40mm D)	11,557	120VAC, 93W
TRA8-42.00X42.00-LHO-OS2-30K	42" W x 42" H x 1.57" D (1,067mm W x 1,067mm H x 40mm D)	13,538	120VAC, 109W
TRA8-48.00X36.00-LHO-OS2-30K	48" W x 36" H x 1.57" D (1,219mm W x 914mm H x 40mm D)	13,538	120VAC, 109W
TRA8-54.00X42.00-LHO-OS2-30K	54" W x 42" H x 1.57" D (1,372mm W x 1,067mm H x 40mm D)	15,519	120VAC, 125W
TRA8-60.00X36.00-LHO-OS2-30K	60" W x 36" H x 1.57" D (1,524mm W x 914mm H x 40mm D)	15,519	120VAC, 125W
TRA8-66.00X42.00-LHO-OS2-30K	66" W x 42" H x 1.57" D (1,677mm W x 1,067mm H x 40mm D)	17,501	120VAC, 140W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.