

## GRANDUER™

### PRODUCT DESCRIPTION

Grandeur™ is a modern LED mirror featuring a softly diffused halo that delivers even, glare-free illumination. Its clean circular form and frosted perimeter offer both functional task lighting and a warm ambient wall-glow, while the slim profile maintains a sleek, refined look. Perfect for bathrooms and contemporary interiors, Grandeur pairs elegant design with everyday practicality.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror using corrosion-resistant, safety-backed mirror glass. Mirror will offer forward-facing task lighting with uniform light output in frosted areas, using natural-looking LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will be designed in America, sourced globally, and have a 3-year limited warranty.

### THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment


### FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 3-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Designed in the USA

### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 720 initial lumens/foot
- CRI: 90+
- Efficacy: 104 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (reported): >54,000-hours

**DIMENSIONAL DRAWING** (Not to scale.)

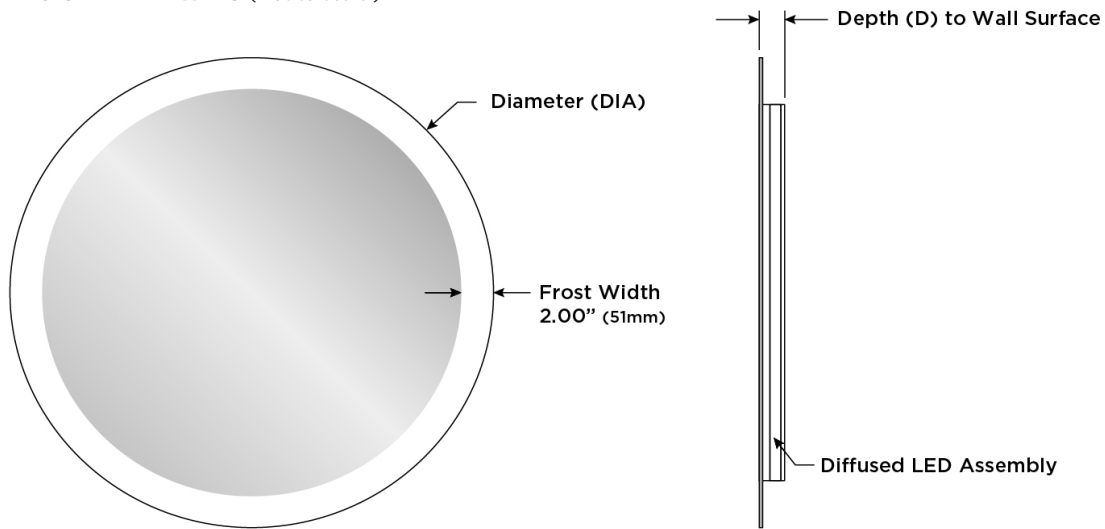

**STANDARD MODELS**

Model Number <sup>1</sup>	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
GRN-30	30" DIA x 1.57" D (762mm DIA x 40mm D)	4,920	120VAC, 40W

**SAFETY & INSTALLATION SPECIFICATIONS**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Fixture should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

<sup>2</sup> Tolerances for dimensions are  $\pm 1/8"$  ( $\pm 3\text{mm}$ ).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.