

## MYSTIQUE™

### PRODUCT DESCRIPTION

The Mystique™ lighted vanity mirror features a refined, modern silhouette available in both round and oval designs. Its integrated perimeter light ring delivers beautifully even, shadow-free illumination ideal for grooming and makeup. With its clean lines and contemporary sophistication, Mystique enhances any bathroom or vanity space—bringing a harmonious blend of function and elegance to your routine.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror using corrosion-resistant, safety-backed mirror glass. Mirror will offer forward-facing task lighting with uniform light output in frosted areas, using natural-looking LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will be designed in America, sourced globally, and have a 3-year limited warranty.

### FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 3-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Designed in the USA


### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 720 initial lumens/foot
- CRI: 90+
- Efficacy: 104 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (reported): >54,000-hours

### THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

**DIMENSIONAL DRAWING** (Not to scale.)

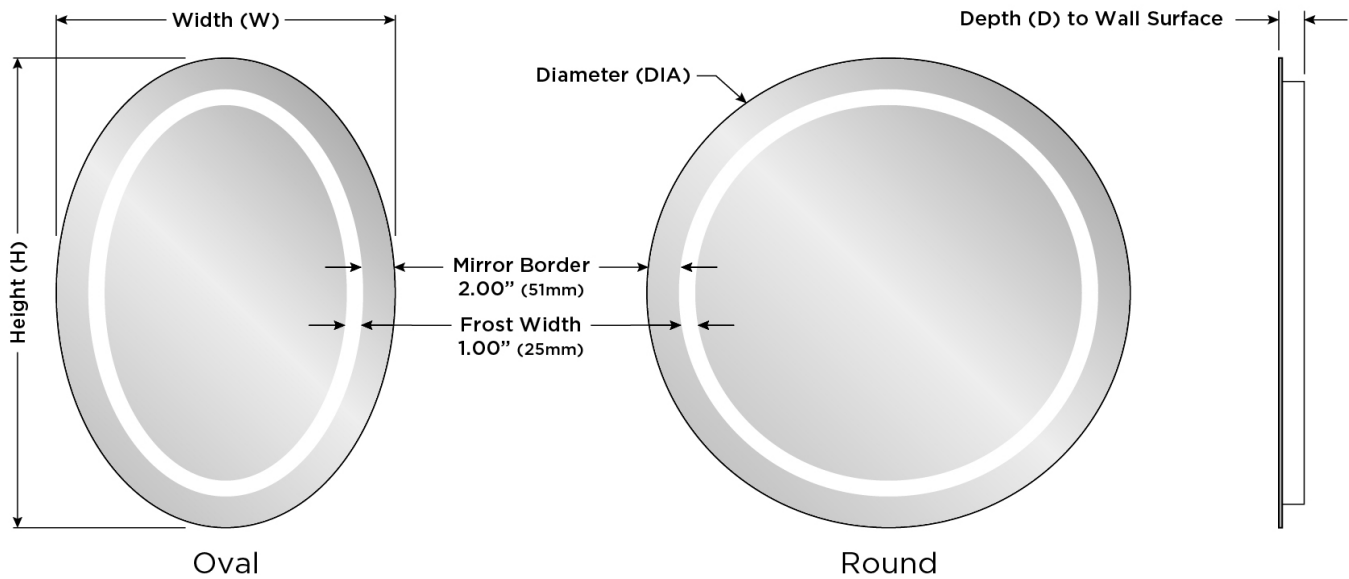

**STANDARD MODELS**

Model Number <sup>1</sup>	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
MYS-2130	21" W x 30" H x 1.57" D (533mm W x 762mm H x 40mm D)	3,720	120VAC, 30W
MYS-30	30" DIA x 1.57" D (762mm DIA x 40mm D)	4,500	120VAC, 36W
MYS-36	36" DIA x 1.57" D (914mm DIA x 40mm D)	5,640	120VAC, 46W

**SAFETY & INSTALLATION SPECIFICATIONS**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Fixture should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.