



PRESTIGE™

PRODUCT DESCRIPTION

The Prestige™ lighted vanity mirror blends sleek design with modern functionality. Its frosted border, illuminated by a softly diffused LED assembly, provides even task lighting for grooming and makeup, complemented by a gentle ambient perimeter wall-glow. With its slim profile and crisp silhouette, Prestige brings a sophisticated, contemporary elegance to any bathroom or vanity space.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror using corrosion-resistant, safety-backed mirror glass. Mirror will offer forward-facing task lighting with uniform light output in frosted areas, using natural-looking LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will be designed in America, sourced globally, and have a 3-year limited warranty.

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 3-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA


LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 720 initial lumens/foot
- CRI: 90+
- Efficacy: 104 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

DIMENSIONAL DRAWING (Not to scale.)

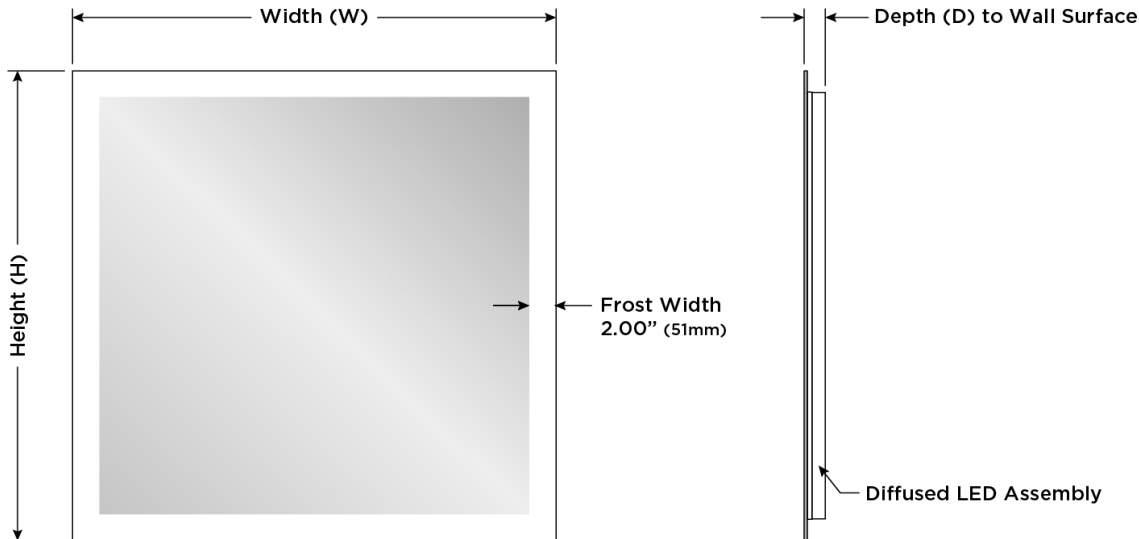

STANDARD MODELS

Model Number ¹	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
PRE-2436	24" W x 36" H x 1.57" D (610mm W x 914mm H x 40mm D)	6,240	120VAC, 50W
PRE-3042	30" W x 42" H x 1.57" D (762mm W x 1,067mm H x 40mm D)	7,680	120VAC, 62W
PRE-3636	36" W x 36" H x 1.57" D (914mm W x 914mm H x 40mm D)	7,680	120VAC, 62W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Fixture should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3\text{mm}$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.