



UNITY™

PRODUCT DESCRIPTION

Sleek, modern, and brilliantly illuminated, the Unity™ mirror transforms any space into a sanctuary of style and clarity. Its crisp LED lighting provides perfect, even illumination for grooming, makeup, or everyday reflection, while the minimalist design adds a touch of contemporary elegance to your bathroom or vanity area. Experience clarity, light, and balance—all in one mirror.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror using corrosion-resistant, safety-backed mirror glass. Mirror will offer forward-facing task lighting with uniform light output in frosted areas, using natural-looking LEDs with 90+ CRI (Color Rendering Index) and delivering 713 initial lumens/foot with an efficacy of 130 lumens/watt. Product will be designed in America, sourced globally, and have a 3-year limited warranty.

FEATURES AND BENEFITS

- Lead-free, copper-free, corrosion-resistant PrimeMirror™
- Forward-facing task lighting for ideal makeup application and grooming
- Phase/triac dimming technology
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 3-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA


LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Illumination: 720 initial lumens/foot
- CRI: 90+
- Efficacy: 104 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours

THE CORDOVA MIRRORS ADVANTAGE

- ✓ High-quality products at a value price
- ✓ Carefully chosen, globally sourced materials
- ✓ Natural-looking LED lighting for a superior reflection
- ✓ Best-in-class customer service team
- ✓ In-stock products ready for immediate shipment

DIMENSIONAL DRAWING (Not to scale.)

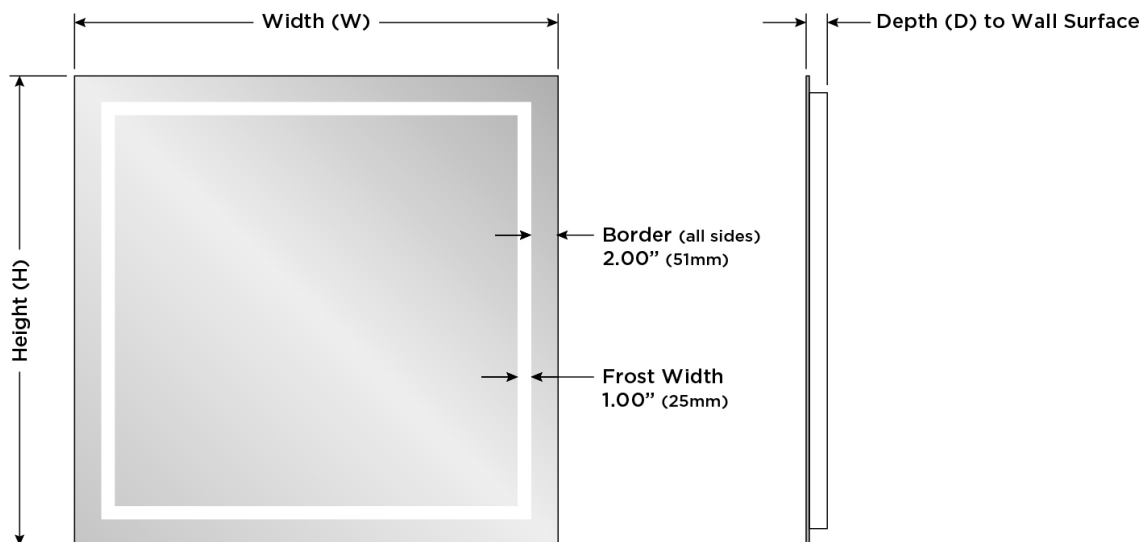

STANDARD MODELS

Model Number ¹	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
UNY-2436	24" W x 36" H x 1.57" D (610mm W x 914mm H x 40mm D)	5,760	120VAC, 47W
UNY-3042	30" W x 42" H x 1.57" D (762mm W x 1,067mm H x 40mm D)	7,200	120VAC, 58W
UNY-3636	36" W x 36" H x 1.57" D (914mm W x 914mm H x 40mm D)	7,200	120VAC, 58W
UNY-3642	36" W x 42" H x 1.57" D (914mm W x 1,067mm H x 40mm D)	7,920	120VAC, 64W
UNY-3636	48" W x 36" H x 1.57" D (1,219mm W x 914mm H x 40mm D)	8,640	120VAC, 70W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Fixture should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Cordova Mirrors.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.